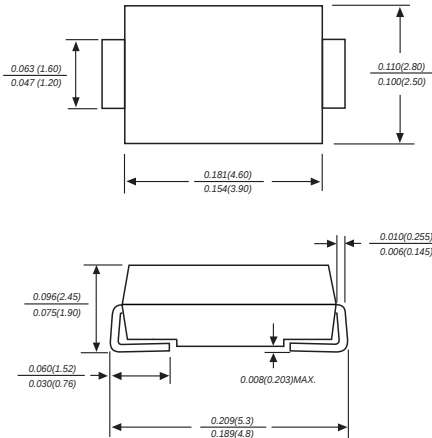


DO-214AC/SMA


Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Ultra fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250 C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.003 ounce, 0.069 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	US1A	US1B	US1D	US1G	US1J	US1K	US1M	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at T _L =55°C	I _(AV)	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30.0							Amps
Maximum instantaneous forward voltage at 1.0A	V _F	1.0			1.3	1.7			Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	5.0 50.0							uA
Maximum reverse recovery time (NOTE 1)	t _{rr}	50				75			ns
Typical junction capacitance (NOTE 2)	C _J	15.0							pF
Typical thermal resistance (NOTE 3)	R _{qJA}	50.0							°C/W
Operating junction and storage temperature range	T _J ,T _{STG}	-50 to +150							°C


Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

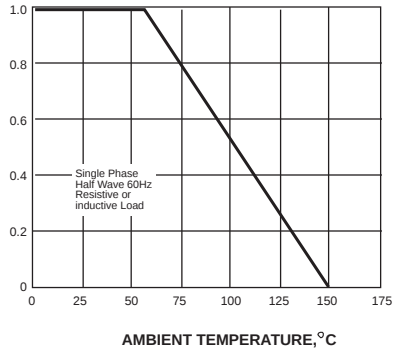

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

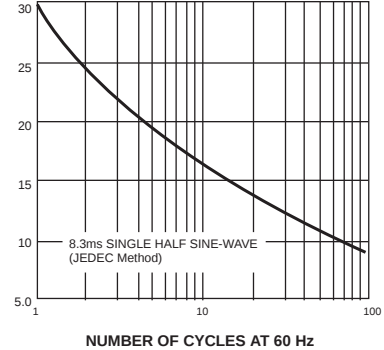


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

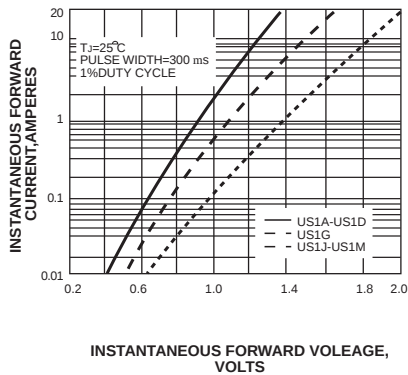


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

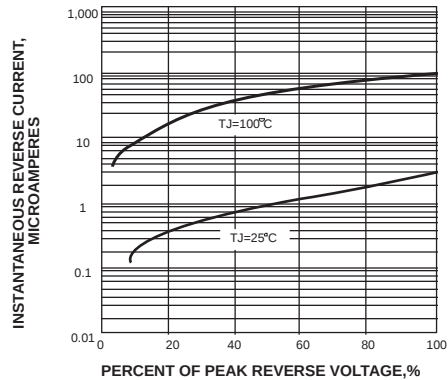


FIG. 5-TYPICAL JUNCTION CAPACITANCE





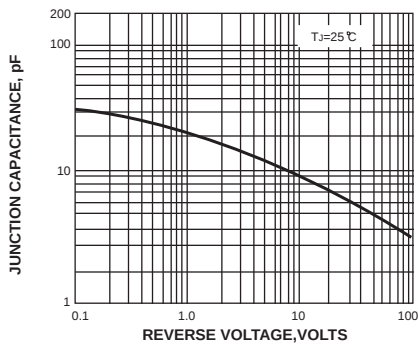


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

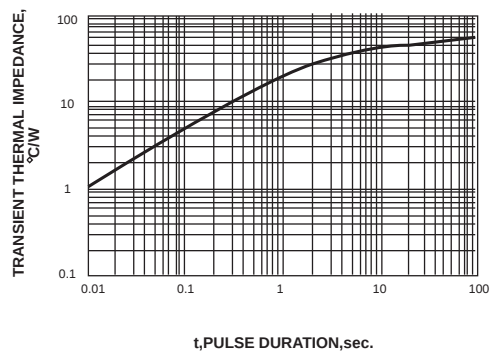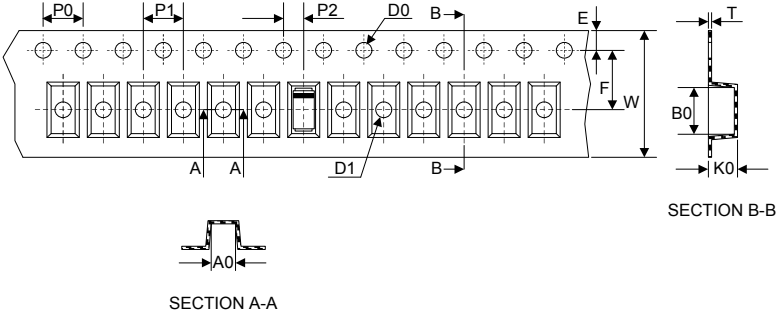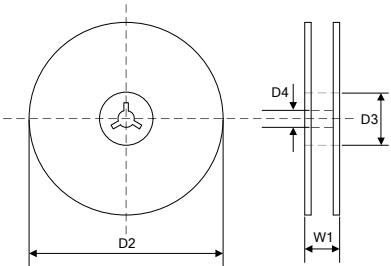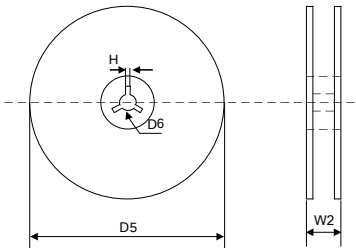

Packaging

Tape 	<table> <tr> <th>Symbol</th><th>Dimension (mm)</th></tr> <tr><td>W</td><td>12.00±0.20</td></tr> <tr><td>P0</td><td>4.00±0.10</td></tr> <tr><td>P1</td><td>4.00±0.10</td></tr> <tr><td>P2</td><td>2.00±0.10</td></tr> <tr><td>D0</td><td>Φ1.5±0.10</td></tr> <tr><td>D1</td><td>Φ1.5±0.10</td></tr> <tr><td>E</td><td>1.75±0.10</td></tr> <tr><td>F</td><td>5.50±0.05</td></tr> <tr><td>A0</td><td>2.79±0.10</td></tr> <tr><td>B0</td><td>5.33±0.10</td></tr> <tr><td>K0</td><td>2.55±0.15</td></tr> <tr><td>T</td><td>0.25±0.05</td></tr> </table>	Symbol	Dimension (mm)	W	12.00±0.20	P0	4.00±0.10	P1	4.00±0.10	P2	2.00±0.10	D0	Φ1.5±0.10	D1	Φ1.5±0.10	E	1.75±0.10	F	5.50±0.05	A0	2.79±0.10	B0	5.33±0.10	K0	2.55±0.15	T	0.25±0.05
Symbol	Dimension (mm)																										
W	12.00±0.20																										
P0	4.00±0.10																										
P1	4.00±0.10																										
P2	2.00±0.10																										
D0	Φ1.5±0.10																										
D1	Φ1.5±0.10																										
E	1.75±0.10																										
F	5.50±0.05																										
A0	2.79±0.10																										
B0	5.33±0.10																										
K0	2.55±0.15																										
T	0.25±0.05																										
7" Reel 	<table> <tr><td>D2</td><td>Φ176.0±5.0</td></tr> <tr><td>D3</td><td>Φ50.0Min.</td></tr> <tr><td>D4</td><td>Φ14.0±2.5</td></tr> <tr><td>W1</td><td>14.0±2.5</td></tr> <tr><td colspan="2">Quantity: 2000PCS</td></tr> </table>	D2	Φ176.0±5.0	D3	Φ50.0Min.	D4	Φ14.0±2.5	W1	14.0±2.5	Quantity: 2000PCS																	
D2	Φ176.0±5.0																										
D3	Φ50.0Min.																										
D4	Φ14.0±2.5																										
W1	14.0±2.5																										
Quantity: 2000PCS																											
13" Reel 	<table> <tr><td>D5</td><td>Φ330.0±5.0</td></tr> <tr><td>D6</td><td>Φ14.0±2.5</td></tr> <tr><td>H</td><td>2.5±1.0</td></tr> <tr><td>W2</td><td>14.0±2.5</td></tr> <tr><td colspan="2">Quantity: 5000PCS</td></tr> </table>	D5	Φ330.0±5.0	D6	Φ14.0±2.5	H	2.5±1.0	W2	14.0±2.5	Quantity: 5000PCS																	
D5	Φ330.0±5.0																										
D6	Φ14.0±2.5																										
H	2.5±1.0																										
W2	14.0±2.5																										
Quantity: 5000PCS																											