


DO-214AB/SMC

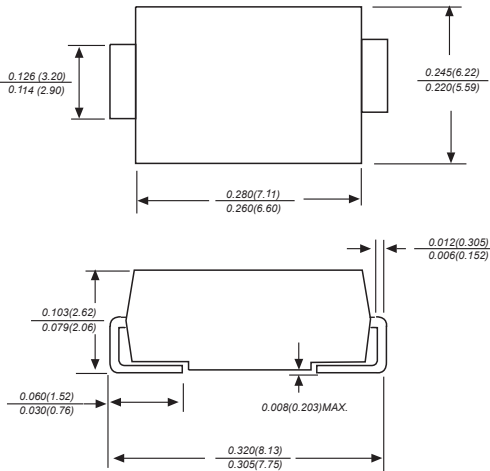

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ◆ Glass passivated chip junction

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body over passivated chip
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.007 ounce, 0.25grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	MURS420	MURS440	MURS460	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	VOLTS
Maximum RMS voltage	V _{RMS}	140	280	420	VOLTS
Maximum DC blocking voltage	V _{DC}	200	400	600	VOLTS
Maximum average forward rectified current at T _L =55°C	I _(AV)	4.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100.0			Amps
Maximum instantaneous forward voltage at 4.0A	V _F	0.90	1.25		Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	5.0 150.0			μA
Maximum reverse recovery time (NOTE 1)	t _{rr}	35	50		ns
Typical junction capacitance (NOTE 2)	C _J	75	63		pF
Typical thermal resistance (NOTE 3)	R _{θJA}	47.0			°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +150			°C

Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$
 2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

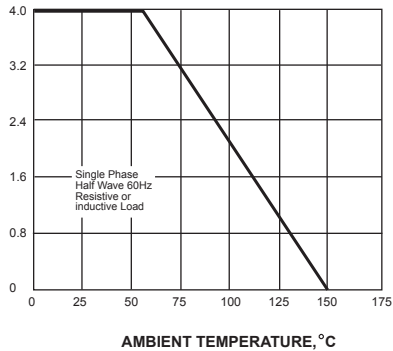

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


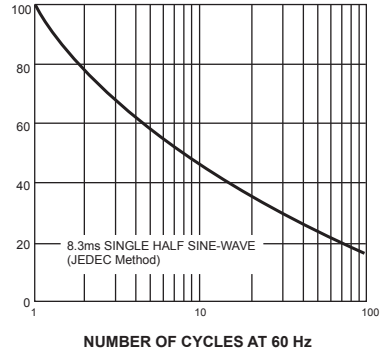


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

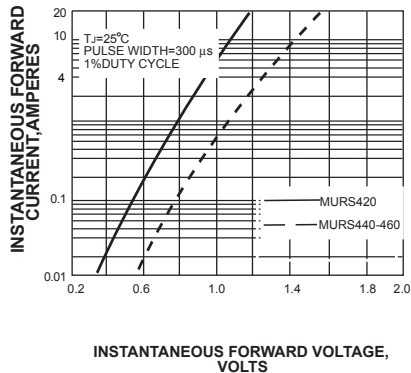

INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



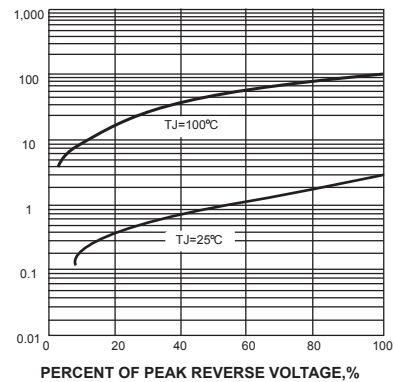





FIG. 5-TYPICAL JUNCTION CAPACITANCE

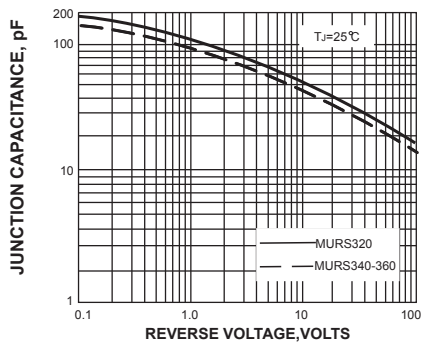

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

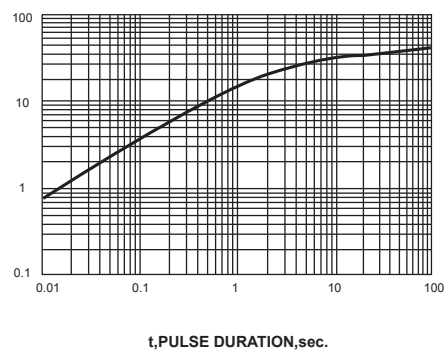

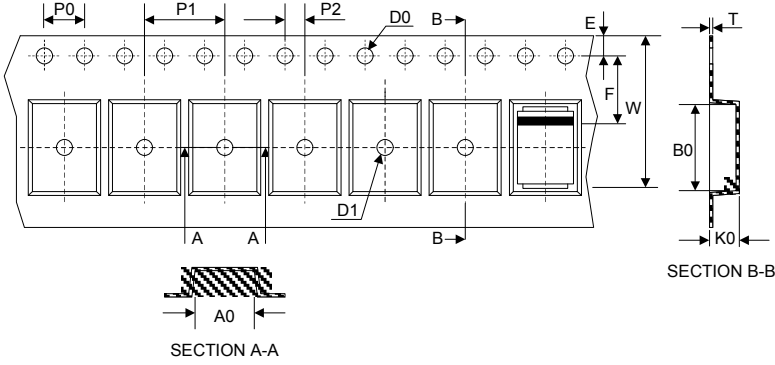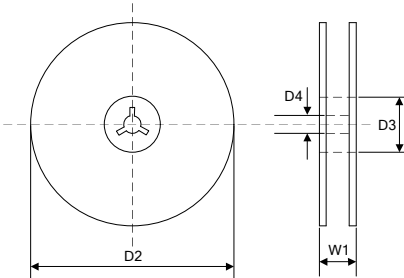Tape 	<table> <tr> <th>Symbol</th><th>Dimension (mm)</th></tr> <tr><td>W</td><td>16.00±0.20</td></tr> <tr><td>P0</td><td>4.00±0.10</td></tr> <tr><td>P1</td><td>8.00±0.10</td></tr> <tr><td>P2</td><td>2.00±0.10</td></tr> <tr><td>D0</td><td>Φ1.5±0.10</td></tr> <tr><td>D1</td><td>Φ1.5±0.10</td></tr> <tr><td>E</td><td>1.75±0.10</td></tr> <tr><td>F</td><td>7.50±0.10</td></tr> <tr><td>A0</td><td>6.27±0.10</td></tr> <tr><td>B0</td><td>8.30±0.10</td></tr> <tr><td>K0</td><td>3.15±0.15</td></tr> <tr><td>T</td><td>0.30±0.05</td></tr> </table>	Symbol	Dimension (mm)	W	16.00±0.20	P0	4.00±0.10	P1	8.00±0.10	P2	2.00±0.10	D0	Φ1.5±0.10	D1	Φ1.5±0.10	E	1.75±0.10	F	7.50±0.10	A0	6.27±0.10	B0	8.30±0.10	K0	3.15±0.15	T	0.30±0.05
Symbol	Dimension (mm)																										
W	16.00±0.20																										
P0	4.00±0.10																										
P1	8.00±0.10																										
P2	2.00±0.10																										
D0	Φ1.5±0.10																										
D1	Φ1.5±0.10																										
E	1.75±0.10																										
F	7.50±0.10																										
A0	6.27±0.10																										
B0	8.30±0.10																										
K0	3.15±0.15																										
T	0.30±0.05																										
7" Reel 	<table> <tr><td>D2</td><td>Φ178.0±2.0</td></tr> <tr><td>D3</td><td>Φ50.0Min.</td></tr> <tr><td>D4</td><td>Φ13.0±0.5</td></tr> <tr><td>W1</td><td>20.0±2.0</td></tr> <tr><td colspan="2">Quantity: 500PCS</td></tr> </table>	D2	Φ178.0±2.0	D3	Φ50.0Min.	D4	Φ13.0±0.5	W1	20.0±2.0	Quantity: 500PCS																	
D2	Φ178.0±2.0																										
D3	Φ50.0Min.																										
D4	Φ13.0±0.5																										
W1	20.0±2.0																										
Quantity: 500PCS																											
13" Reel 	<table> <tr><td>D5</td><td>Φ330.0±2.0</td></tr> <tr><td>D6</td><td>Φ13.5±0.5</td></tr> <tr><td>H</td><td>2.5±1.0</td></tr> <tr><td>W2</td><td>20.0±2.0</td></tr> <tr><td colspan="2">Quantity: 3000PCS</td></tr> </table>	D5	Φ330.0±2.0	D6	Φ13.5±0.5	H	2.5±1.0	W2	20.0±2.0	Quantity: 3000PCS																	
D5	Φ330.0±2.0																										
D6	Φ13.5±0.5																										
H	2.5±1.0																										
W2	20.0±2.0																										
Quantity: 3000PCS																											