

SS1045L


Surface Mount Schottky Rectifier

Features


- **Schottky Technology**
- **Low Profile Flatpack 1.1mm Case Height**
- Extremely Fast Switching
- Low Forward Voltage Drop
- Low Conduction Losses
- Designed for Surface Mount Application
- Plastic Material – UL Flammability 94V-0

Mechanical Data

- Case: TO-277B, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Weight: 0.09 grams (approx.)
- Mounting Position: Any
- Marking: Device Code, See Page 3
- **Lead Free: For RoHS / Lead Free Version, Add “-LF” Suffix to Part Number, See Page 4**

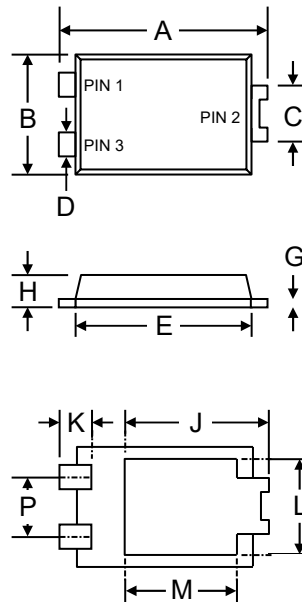

TO-277B		
Dim	Min	Max
A	6.40	6.60
B	3.80	4.30
C	1.70	1.90
D	0.80	1.00
E	5.20	5.80
G	0.33	0.43
H	1.00	1.20
J	4.35	4.65
K	0.74	1.10
L	3.10 Typical	
M	3.50	3.70
P	1.90 Typical	
All Dimensions in mm		



Maximum Ratings @T_A=25°C unless otherwise specified







Single Phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	45	V
Average Rectified Output Current (Note 1) @T _L = 110°C	I _O	10	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	150	A
Thermal Resistance Junction to Case (Note 1)	R _{θJC}	12	°C/W
Thermal Resistance Junction to Ambient (Note 1)	R _{θJA}	60	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-40 to +150	°C


Electrical Characteristics @T_A=25°C unless otherwise specified

Characteristic	Test Conditions		Symbol	Typ	Max	Unit
Forward Voltage	I _F = 5.0A	T _A = 25°C	V _F	0.42	—	V
	I _F = 10A			0.48	0.52	
	I _F = 5.0A	T _A = 125°C		0.32	—	
	I _F = 10A			0.42	—	
Reverse Leakage Current (Note 2)	V _R = 45V	T _A = 25°C	I _R	0.05	0.30	mA
		T _A = 125°C		9	35	


Note: 1. Mounted on FR-4 PC board with 70mm x 70mm pad area.
2. Pulse width ≤ 40ms.

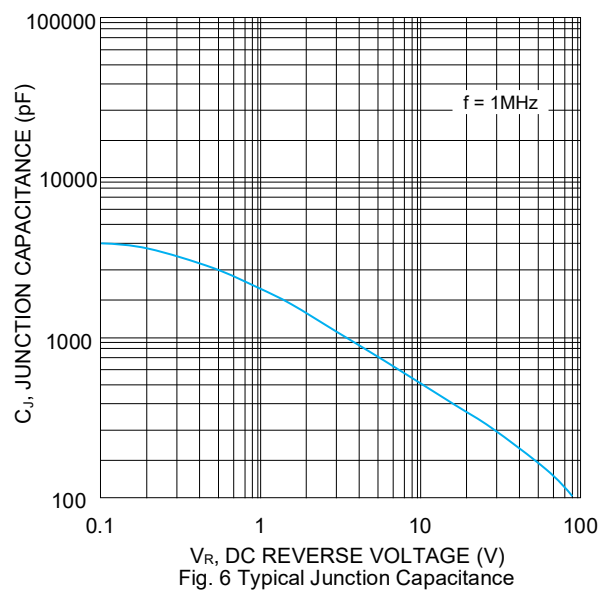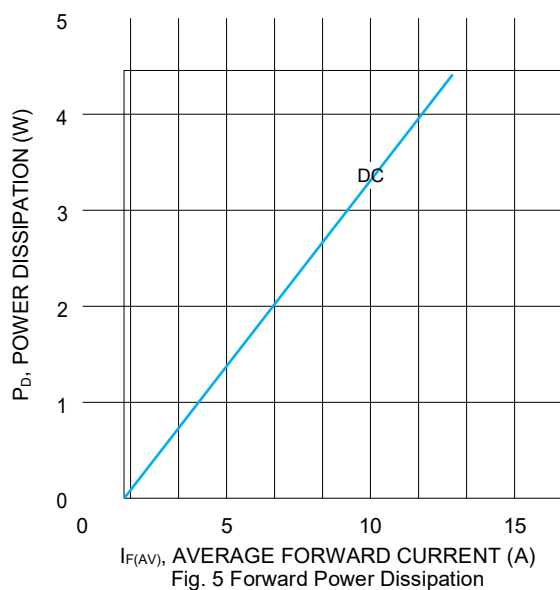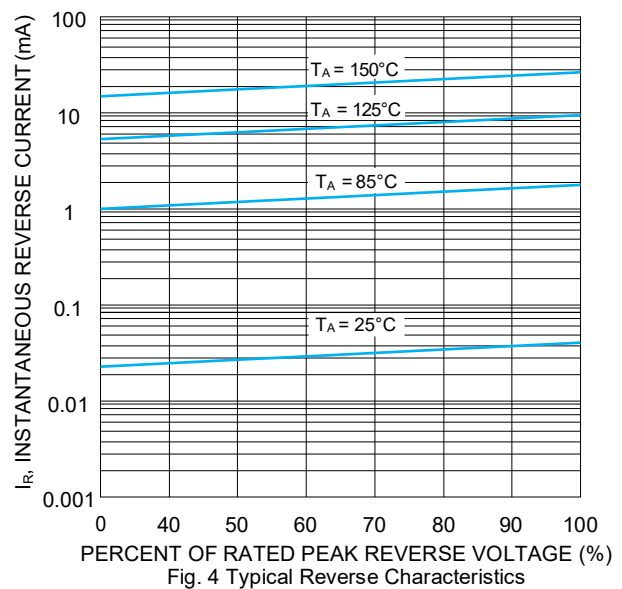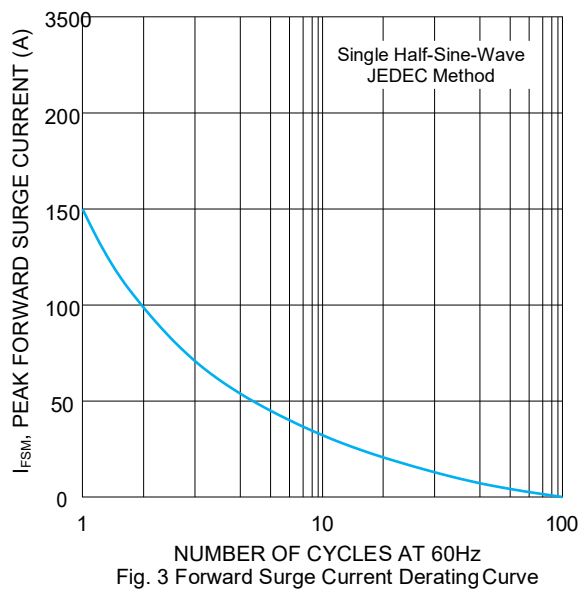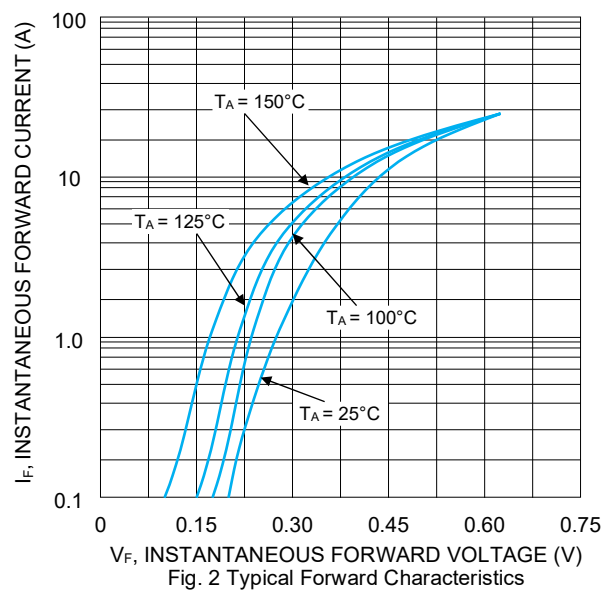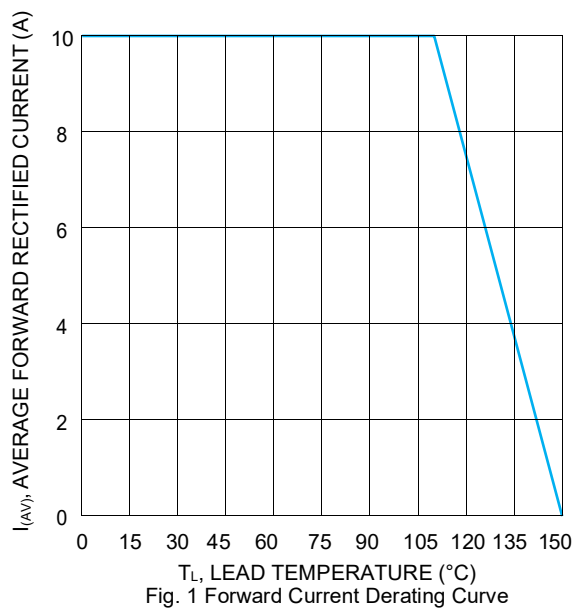

MARKING INFORMATION

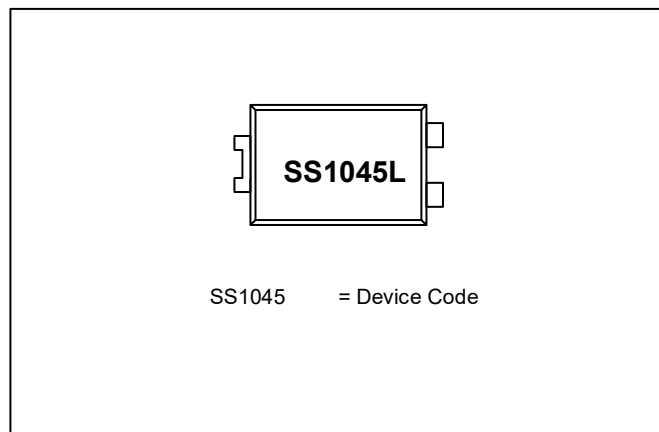


RECOMMENDED FOOTPRINT

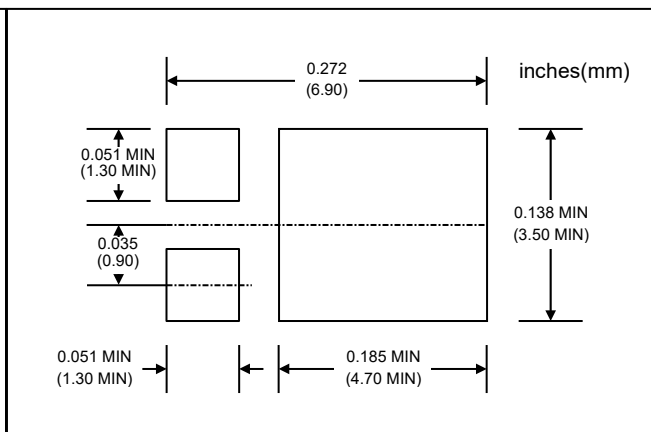

PACKAGING INFORMATION

TAPE & REEL

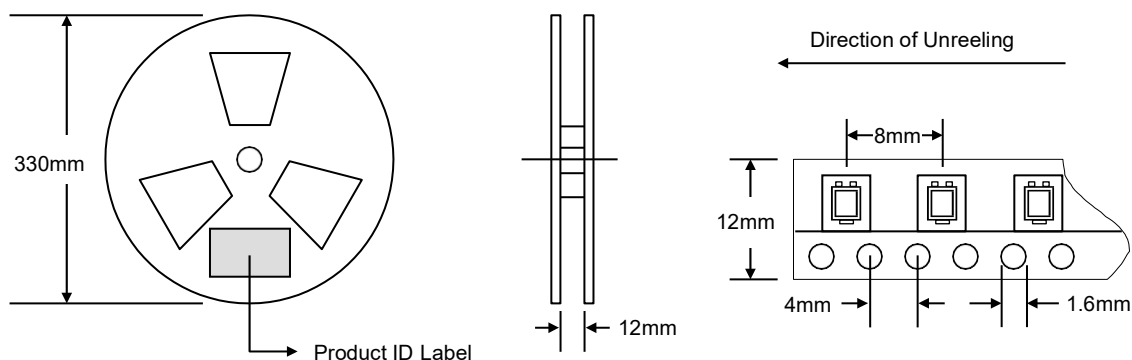

Reel Diameter (mm)	Quantity (PCS)	Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
330	5,000	340 x 337 x 45	10,000	370 x 370 x 420	80,000	21.0

Note: 1. Paper reel, white or gray color.
2. Components are packed in accordance with EIA standard 481-1 and 481-2.

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
SS1045L-T3	TO-277	5000/Tape & Reel

1. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
2. **To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, SS1045L-T3-LF.**

Please Read Carefully

Thank you for using or about to use our company's products. We suggest that you carefully read this material before use.

- Our company strives to provide users with higher quality products and services.
- Jiangsu POWERSi Microelectronics Co., Ltd. will periodically optimize its products and corresponding specifications, and may not be able to notify you in a timely manner. Please download the latest version regularly.
- Jiangsu POWERSi Microelectronics Co., Ltd. assumes no responsibility or risk for any use of its products for special purposes.
- Jiangsu POWERSi Microelectronics Co., Ltd. holds patent rights for its own products.
- Any semiconductor product has a certain possibility of failure or malfunction under specific conditions. The buyer is requested to comply with safety standards and take safety measures when using products from Jiangsu POWERSi Microelectronics Co., Ltd. for system design and complete machine manufacturing, in order to avoid situations that may cause personal injury or property damage!